

주철 1MPa 나사식 증기 여과기

CAST IRON 1MPa SCREWED STRAINER




KS B 1538

Main parts and materials

Parts name	Material
Body	Grey iron
Bonnet	Copper
Filter	Stainless steel

Specification

Applicable Fluid	Water, Steam
Working Pressure	Less than 10kgf/cm ² (Max. 1.0MPa)
Applicable Temperature	Less than 220℃, Water 80℃
Connection Method	PT Screwed
Hydraulic Test	20kgf/cm ² (2.0MPa)

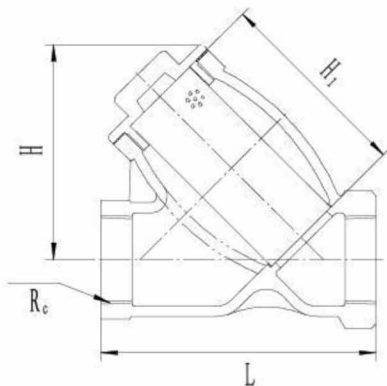

Outline and connecting measurement

Size	L	D	H
15	80	34	58
20	95	40	69
25	110	50	83
32	135	58	100
40	160	66	114
50	185	80	145

*The above specifications to be varied to suit your specific requirements.